

Wind power characteristics of seven data collection sites in Jubail, Saudi Arabia using Weibull parameters

. A. Baseer^{ab*}, J.P. Meyer^a, S. Rehman^c, Md. M. Alam^d.

^aMechanical and Aeronautical Engineering Department, University of Pretoria, Pretoria, South Africa

^bDepartment of Mechanical & Manufacturing Engineering Technology , Jubail Industrial College, Jubail, Saudi Arabia
E-mail: abaseer77@yahoo.com

*Corresponding author

E-mail: Josua.Meyer@up.ac.za

^cCenter for Engineering Research, Research Institute, King Fahd University of Petroleum and Minerals, Dhahran-31261, Saudi Arabia

E-mail: srehman@kfupm.edu.sa

^dInstitute for Turbulence-Noise-Vibration Interaction and Control, Shenzhen Graduate School, arbin Institute of Technology, Shenzhen 518055, China

E-mail: alamm28@yahoo.com

Abstract:

The wind characteristics of seven locations in Jubail, Saudi Arabia were analysed by using five years of wind data of six sites and three years data of one site at 10 m above ground level (AGL). The highest annual mean wind speed of 4.52 m/s was observed at Industrial area (east) and lowest of 2.52 m/s at Pearl beach with standard deviations of 2.52 and 1.1 m/s respectively. Weibull parameters were estimated using maximum likelihood, least-squares regression method (LSRM) and WAsP algorithm. The most probable and maximum energy carrying wind speed were found by all the three methods. The correlation coefficient (R^2), root mean square error (RMSE), mean bias error (MBE) and mean bias absolute error (MAE) showed that all three methods represent wind data at all sites accurately. However, the maximum likelihood method is slightly better than LSRM followed by WAsP algorithm. The wind power output at all seven sites from five commercially available wind machines of rated power from 1.8 - 3.3 MW showed that Jubail industrial area (east) is most promising. The energy output from a 3 MW wind machine at this site was found to be 11,136 MWh/yr. with a plant capacity factor (PCF) of 41.3%.

Keywords: Wind power; Weibull parameters; maximum energy carrying wind speed; most probable wind speed; plant capacity factor.

1. Introduction

The term green energy is used for those sources of energy which do not produce any of the harmful greenhouse gases. Further, the cleanest sources of energy are those which utilise the natural flows of the earth. These sources are known as renewable sources of energy and they will never die out unlike fixed reserves of fossil and nuclear fuels which emit greenhouse gases. Wind energy is one of the promising sources of renewable energy and is getting worldwide recognition due to its competitive cost of production compared with traditional means.

Wind speed frequency distribution is an important statistical tool in predicting the wind energy output at a particular location [1]. The Weibull distribution function is found to represent the variable nature of wind speed better than other distributions in most of the locations worldwide [2, 3, 4, 5]. The Weibull function is a two-parameter function, namely, shape parameter, k and scale parameter, c . There are several methods available in the literature for the determination of these two parameters. Stevens and Smulders [6] found the values of k and c by five different estimation methods namely, method of moments, method of energy pattern factor, maximum likelihood method, Weibull probability paper method and percentile estimators. Almost same values were obtained by all five methods.

Seguro and Lambert [7] calculated the Weibull parameters using maximum likelihood method, graphical method and modified maximum likelihood method. It was reported that when wind speed data is available in time-series format, the maximum likelihood method is the recommended method for estimating the parameters. When wind speed data is available in frequency distribution format, the modified maximum likelihood method is the recommended method. The graphical method is reported to be the least accurate. Bagiorgas et al. [8] calculated the Weibull parameters using the wind data

from seven different sites in Saudi Arabia. The parameter estimation methods used were least-squares regression method, method of moments, alternative maximum likelihood estimation method, maximum likelihood method, and WASP Algorithm. The calculated values using the five different methods were found to be in good agreement at all the measurement heights. The correlation between the monthly mean values of Weibull scale parameter and the measured wind speed values was found to be linear at all the sites.

Rocha et al. [9] compared seven numerical methods for determining the Weibull parameters at northeast region of Brazil. The estimation methods were graphical method, maximum likelihood method, energy pattern factor method, moment method, empirical method, modified maximum likelihood method, and equivalent energy method. The equivalent energy method was found to be efficient for determining the k and c parameters to fit Weibull distribution curves for wind speed data.

Akdag and Dinler [10] developed a new method called power density method for estimation of Weibull parameters. This new method was compared with graphic, maximum likelihood and moment methods and it was concluded that power density method is suitable and efficient for Weibull parameters estimation for the given location.

Wind speed assessment of six sites in the island of Crete, Greece was done [11]. The effect of topographical features on wind characteristics was studied. The Weibull, Rayleigh, Lognormal, Gamma, and Inverse Gaussian distributions probability distributions were examined for their ability to model the wind speed frequency distributions. The most efficient methods for the estimation of the distribution parameters were found to be moments method, maximum likelihood method, and least-squares method.

For wind resource assessment of Selcuk University campus in Turkey, one year wind data at three different heights was analysed [12]. Energy output from a 6 MW installed

capacity wind farm composed of 1.0, 1.5, and 2.0 MW rated power wind turbines was calculated and reported by Faruk et al. [12]. The minimum basic payback period was found to be 6.44 years.

Onca et al. [13] presented the wind resource assessment of north-western side of the Black Sea using measured wind speed data over a period of 11 years. The analysis indicated that the Romanian coastal region has more wind energy potential during the winter season, with an average annual wind speed of about 9.7 m/s at 80 m and a power density of 870 W/m². This study concluded that the north-western side of the Black Sea is a promising site for the wind farm development.

The forecast of energy demand in Saudi Arabia is expected to be more than double in the next one and a half decade, from 58 GW in 2015 to 121 GW in 2030 [14]. It is an urgent requirement to fill this gap of approx. 60 GW of power generation and at the same time reduce the load on diminishing oil and gas reserves. Wind energy along with solar energy - Photovoltaic (PV) and Concentrated Solar Power (CSP) are serious considerations to fill this energy gap [14]. This study aims at conducting a comprehensive and accurate wind resource assessment at seven locations of the largest industrial enterprise in middle-east by finding Weibull parameters, maximum energy carrying capacity, most probable wind speed, energy output from a few commercially available wind machines and comparing parameter estimation methods.

2. Sites, equipment and data description

In 1933, geologists explored oil in Jubail, Saudi Arabia. In 1983, the largest engineering and construction project ever was started at Jubail industrial city. Presently, Jubail industrial city is host to more than 160 industrial enterprises and home to almost 95,000 residents. The Jubail infrastructure has the capability to operate continuously without failure of power in any of the existing facilities while meeting community requirements

within high modern living standards where all the necessities of life and tourism and recreation are available.

To study the viability of wind power generation for the Jubail city, the historical wind data from seven weather stations was obtained from the Environment and Control Department (Royal commission for Jubail). The locations of these sites are shown in Fig. 1. The photos of the wind towers at Industrial area (central), Al Bahar desalination plant, Pearl beach and Al-Reggah district are shown in Fig. 2, 3, 4 and 5 respectively. All the seven sites are located within a radius of 20 kms. The availability of long term wind speed data or an accurate forecasting method for missing data is very important in identifying suitable locations for wind turbines [15]. This governmental organisation is responsible for the maintenance, calibration and collection of meteorological data at Jubail Industrial city. The latitude/longitude and UTM coordinates of the weather station are given in Table. 1. The specifications of the wind speed sensors installed on the wind tower are given in Table 2. The list of weather parameters recorded is given in Table 3. The description of the terrain in the vicinity of all the sites is given in Table 4.

The coastal city of Jubail also hosts world's largest water desalination plant, Saline water conversion corporation, SWCC. This plant produces 363.4 million cubic meters of water per annum supplying it to national capital, Riyadh and Jubail [16]. The desalination in this plant is done by conventional means and out of all the alternatives of renewable energy desalination, wind powered desalination can be considered most promising [17].



Fig. 1. Weather stations in Jubail industrial city

Table 1

Latitude/longitude and UTM coordinates of weather data collection sites.

Site Code	Site name	Degrees, Minutes, Seconds	Station height, m AGL
Site 1	Industrial area (Central)	27° 2'15.76"N	10, 50 & 90
		49°32'2.56"E	
Site 2	Al-Bahar desalination plant	27° 4'27.49"N	10
		49°36'3.24"E	
Site 3	Pearl beach	27° 0'36.85"N	10
		49°39'9.56"E	
Site 4	Naval Base	26°55'39.92"N	10
		49°42'42.89"E	
Site 6	Industrial area 2 (South)	26°55'13.40"N	10
		49°29'0.10"E	
Site 8	Al-Reggah District	27° 7'54.03"N	10
		49°31'57.02"E	
Site 9	Industrial area (East)	27° 1'49.95"N	10
		49°36'41.14"E	

Table 2

Specifications of the wind speed sensor at data collection site.

PERFORMANCE CHARACTERISTICS	
Maximum Operating Range:	0 - 125 mph (0 - 60 m/s)
Starting Speed:	0.5 mph (0.22 m/s)
Calibrated Range:	0 - 100 mph (0 - 50 m/s)
Accuracy:	±1% or 0.15 mph (0.07 m/s)
Resolution:	<0.1 mph or m/s
Temperature Range:	-50°C to +65°C (-58°F to +149°F)
Distance Constant:	less than 5 ft (1.5m) of flow (meets EPA specifications)
ELECTRICAL CHARACTERISTICS	
Power Requirements:	12 VDC at 10 mA, 12 VDC at 350 mA for internal heater
Output Signal:	11 volt (pulse frequency equivalent to speed)
Output Impedance:	100 Ω maximum
PHYSICAL CHARACTERISTICS	
Weight:	1.5 lbs (.68 kg)
Finish:	Clear anodised aluminium; Lexan cup assembly.
CABLE & MOUNTING	
PN 1953 Mounting:	Cable Assembly; specify length in feet or metres PN 191 Crossarm Assembly

Table 3

Parameter list of the weather data collection tower.

Sr.No	Parameter Code	Description	Unit
1	ATM	Atmospheric Temperature	DegC
2	PRE	Precipitation	mm
4	RH	Relative Humidity	%
6	VWD10	Vector Wind Direction 10m	deg
9	VWS10	Vector Wind Speed 10m	m/s



Fig. 2. Wind tower at Industrial area (Central)



Fig. 3. Wind tower at Al-Bahar desalination plant



Fig. 4. Wind tower at Pearl beach



Fig. 5. Wind tower at Al-Reggah district

Table 4

Description of the terrain in the vicinity of weather stations.

Site	Description
Industrial area (Central)	Only station where weather data is available at three heights AGL. Surrounded mainly by plain terrain with some warehouses of 8 - 10 m height about 200 m away in west direction.
Al-Bahar desalination plant	Located on sea shore near desalination plant. Terrain is mostly plain and surrounded by very small shrubs.
Pearl beach	Located in Jubail residential area and surrounded by 3-4 story buildings. This station recorded minimum wind speed out of all weather stations.
Naval Base	Located near Dhahran-Jubail highway. Terrain is mostly plain and surrounded by very small shrubs and few residential buildings 200 m away towards east.
Industrial area 2 (South)	Surrounded mainly by plain terrain with some warehouses of 8 - 10 m height about 300 m away in west and north direction.
Al-Reggah District	Location mostly surrounded by shrubs. Surrounding clear with a 3 story building around 150 m away in north-eastern direction.
Industrial area (East)	Surrounded mainly by plain terrain with some warehouses of 8 - 10 m height about 150 m away in north - west direction

- This study presents the analysis of wind characteristics from seven different sites at Jubail city in Saudi Arabia at 10 m height above ground level (AGL). The wind data is collected over a period of 5 years (2008 - 2012) for all sites except the site at Naval base where the data was available for 3 years (2010 - 2012).

2.1 Statistics of Wind Speed

The hourly average wind speed values over entire period of data collection for all the seven sites at 10 m height are presented in Table 5. The highest annual mean wind

speed of 4.53 m/s was observed at Industrial area (East) and the lowest of 2.25 m/s at Pearl beach with standard deviations of 2.52 and 1.1 m/s respectively. To assess the seasonal variation of wind speed over all sites, the data is sorted month-wise and the monthly maximum, daily high/low (in that month), mean, and monthly minimum wind speeds are plotted. These plots are shown in Fig. 6. It was observed that the highest monthly mean wind speed was witnessed in February/June at all sites; this period coincides with the high energy demand period for the region due to air conditioning load. The lowest mean wind speed was witnessed in September/October at all sites. To visualize the wind patterns at all the sites, the wind rose charts, showing the frequency and speed of wind blowing from each of 16 cardinal directions were plotted as shown in Fig. 7. These rose plots for a particular site can help in wind machine design decisions. It can be observed from these plots that the most prevailing wind direction at all sites was from the north-west.

Table 5
Wind speed statistics of all sites.

Station	Annual mean wind speed, m/s		
	Mean	Maximum	Standard Deviation
Industrial area (Central)	3.27	11.90	1.985
Al-Bahar desalination plant	3.74	2.40	2.193
Pearl beach	2.26	8.70	1.109
Naval Base	3.78	13.80	2.220
Industrial area 2 (South)	4.31	27.00	2.983
Al-Reggah District	2.91	13.60	1.511
Industrial area (East)	4.53	19.30	2.520



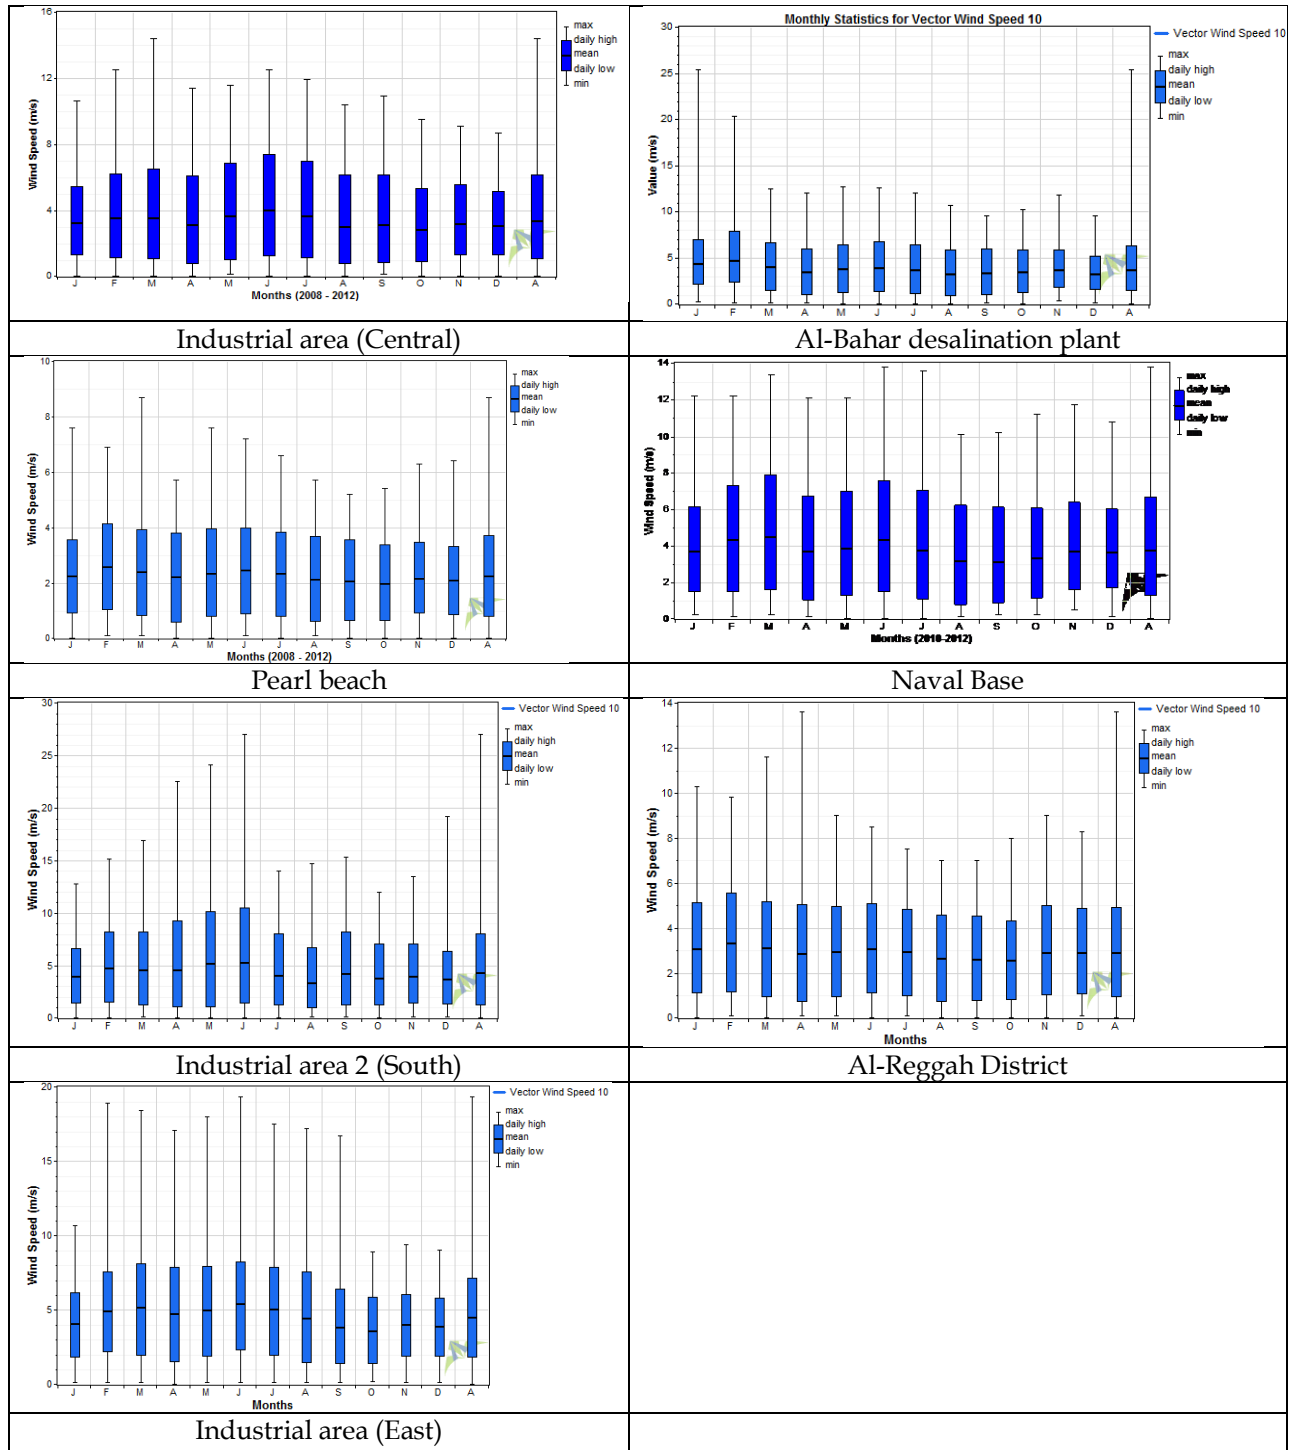



Fig. 6. Monthly maximum, daily high, daily mean, daily low and minimum wind speed at all sites.

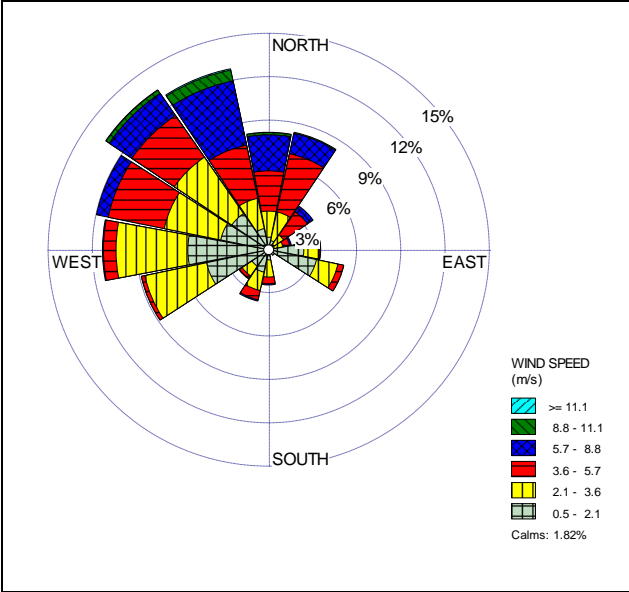


Industrial area (Central)

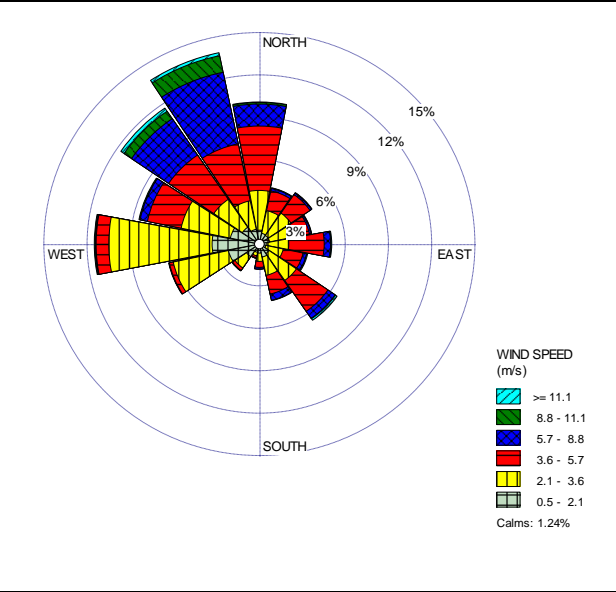

Al-Bahar desalination plant

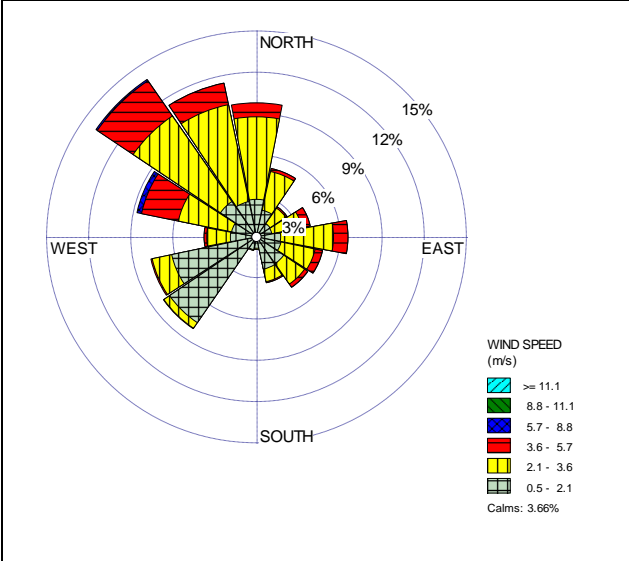

Pearl beach

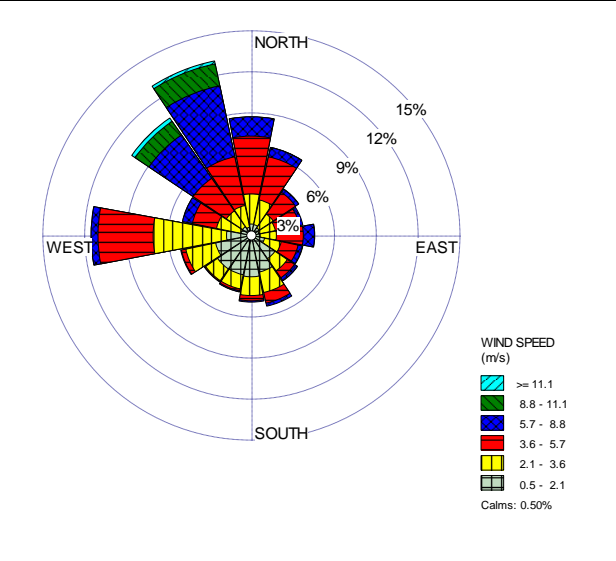

Naval Base

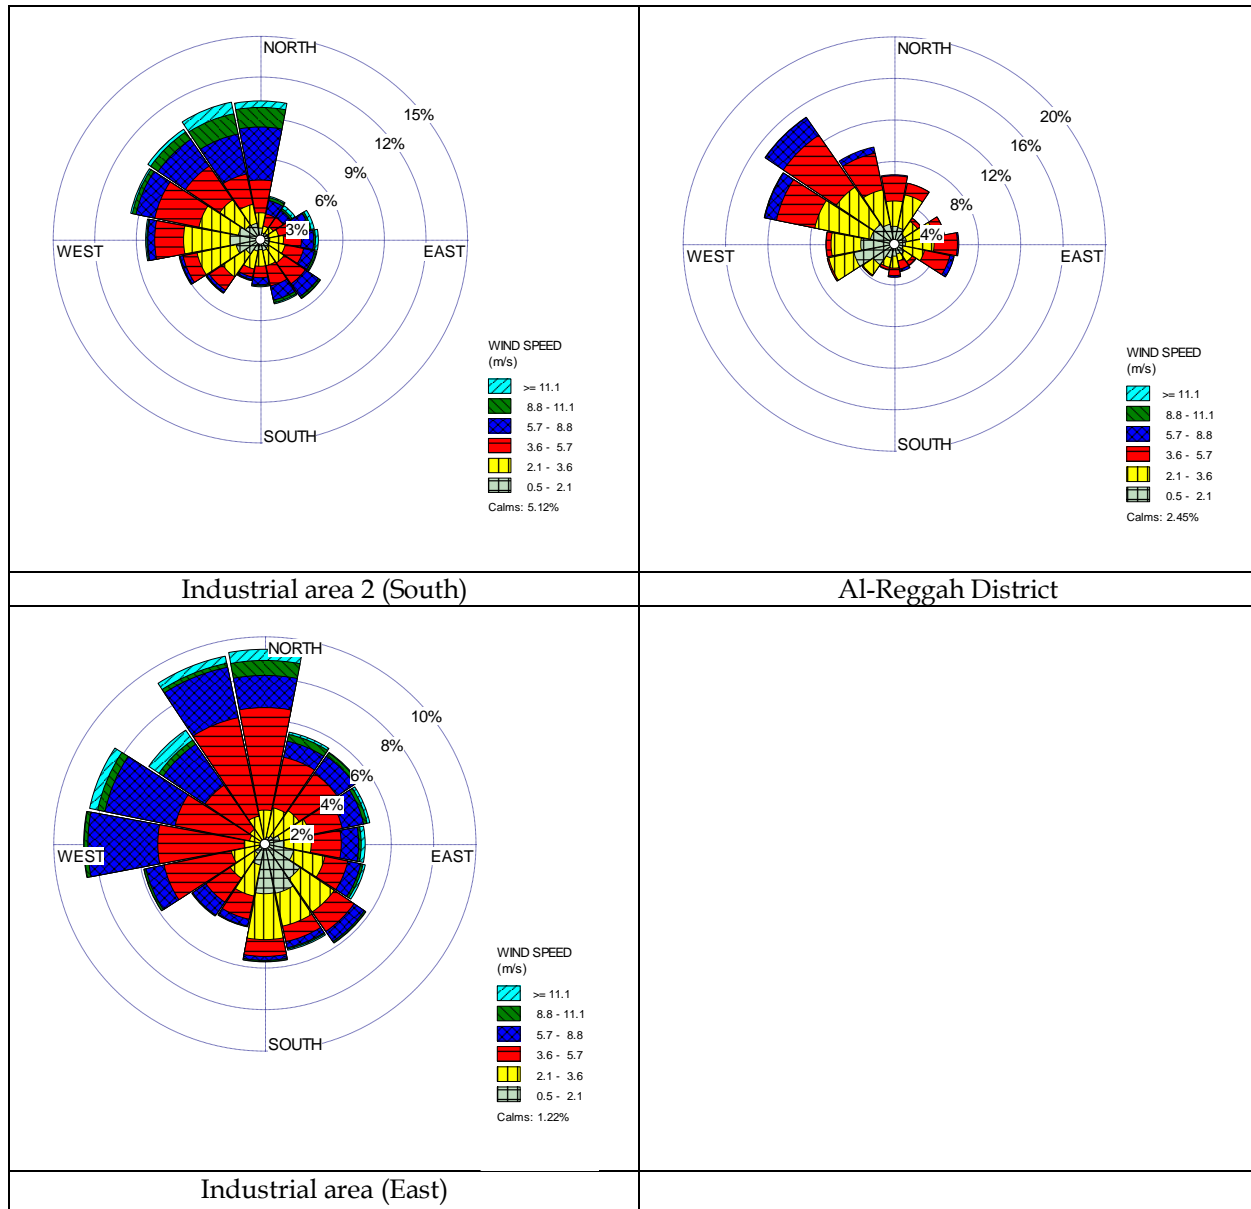


Fig. 7. Wind rose plots at 10 m AGL at all sites

3. Numerical methods for determining the Weibull parameters

The two-parameter Weibull distribution is frequently used to characterise wind behaviour because it provides a good representation of wind data [2, 3, 4, 5]. This distribution function shows the probability of the wind speed in a 1 m/s bins centered on a particular wind data time series. The Weibull distribution function is expressed as [18]:

$$P(v) = \frac{k}{v} \left(\frac{v}{c}\right)^{k-1} \exp\left\{-\left(\frac{v}{c}\right)^k\right\}, \quad (1)$$

Where $P(v)$ is the frequency of incidence of wind speed, v . The scale factor, c in m/s, is indicative of mean wind speed and k is the dimensionless shape factor, which describes the shape and width of the distribution. The Weibull distribution is therefore determined by the parameters, c and k . The cumulative Weibull distribution, $P(v)$, which gives the probability of the wind speed greater than the value, v , is expressed as:

$$P(v) = \exp\left\{-\left(\frac{v}{c}\right)^k\right\}, \quad (2)$$

There are several methods to estimate Weibull parameters. Three methods commonly used are discussed in this study.

3.1 Maximum Likelihood Method

Maximum likelihood method was suggested by Stevens and Smulders [6]. This method requires extensive iterative calculations. Shape and scale parameters of Weibull distribution are estimated by these two equations

$$k = \left(\frac{\sum_{i=1}^n v_i^k \ln(v_i)}{\sum_{i=1}^n v_i^k} - \frac{\sum_{i=1}^n \ln(v_i)}{n} \right)^{-1} \quad (3)$$

$$c = \left(\frac{\sum_{i=1}^n (v_i)^k}{n} \right)^{\frac{1}{k}} \quad (4)$$

Where v_i is the wind speed and n is the number of nonzero wind speeds. This method is implemented by taking care of zero wind speeds which make logarithm indefinite and then calculate shape parameter. The scale parameter is found using a numerical technique in order to find the root of Eq. (3) around $k = 2$.

3.2 Least-Squares Regression Method (LSRM)

The equation of the probability density function, after a double logarithmic transformation, can be written as follows:

$$\ln[-\ln(1 - F(v))] = k \ln(c) \quad (5)$$

The above equation is linear and can be fitted using the LSRM [19]. The cumulative distribution function $F(v)$ can be estimated easily, using an estimator, which is the median rank.

The wind power density, WPD, for maximum likelihood method and least-squares regression method is computed using the following equation:

$$WPD = \frac{1}{2} \rho c^3 \quad (6)$$

Where:

ρ : air density within the time step, kg/m³.

c : weibull scale parameter, measure of average wind speed within the time step, m/s.

3.3 WAsP Algorithm

There are two requirements of WAsP algorithm

- (1) The power density of the fitted Weibull distribution is equal to that of the observed distribution and
- (2) The proportion of values above the mean is the same for the fitted Weibull distribution as for the observed distribution.

Let X represents the proportion of the observed wind speeds that exceed the mean wind speed. The cumulative distribution function $F(U)$ gives the proportion of values that are less than U , so $1-F(U)$ is the proportion of values that exceed U . One can therefore write the second requirement as follows:

$$X = 1 - F(\bar{U}) \quad (7)$$

Since the mean wind speed is given by the following equation:

$$\bar{U} = c\Gamma\left(\frac{1}{k} + 1\right) \quad (8)$$

Substitute the aforementioned mean value in the expression of the cumulative distribution function to get second requirement:

$$X = \exp\left[-\Gamma\left(\frac{1}{k} + 1\right)^k\right] \quad (9)$$

Taking the natural logarithm of both sides gives

$$-\ln X = \Gamma\left(\frac{1}{k} + 1\right)^k \quad (10)$$

In performing the WAsP algorithm to fit the Weibull distribution, WindoGrapher [20] software (<http://www.mistaya.ca/>) calculates X and then solves the above equation iteratively by using the Brent method, in order to find the k parameter. Requirement (1) allows us to calculate the c parameter. On the basis of the Weibull distribution, in WAsP algorithm, the mean WPD, assuming constant air density, is calculated as follows:

$$WPD = \frac{1}{2} \rho c^3 \Gamma\left(\frac{3}{k} + 1\right) \quad (11)$$

We can also write an equation for the mean power density of the observed wind speeds as follows:

$$WPD = \frac{1}{2N} \rho \sum_N U_i^3 \quad (12)$$

As per requirement (1), these must be equal, so one can write,

$$c^3 \Gamma\left(\frac{3}{k} + 1\right) = \frac{1}{N} \sum_N U_i^3 \quad (13)$$

Solving this for c gives us the following:

$$c = \sqrt[3]{\frac{\sum_N U_i^3}{N \Gamma\left(\frac{3}{k} + 1\right)}} \quad (14)$$

The actual wind data and Weibull curves at all seven sites (maximum likelihood method, least squares regression methods and WAsP method) are also shown in Fig. 8.

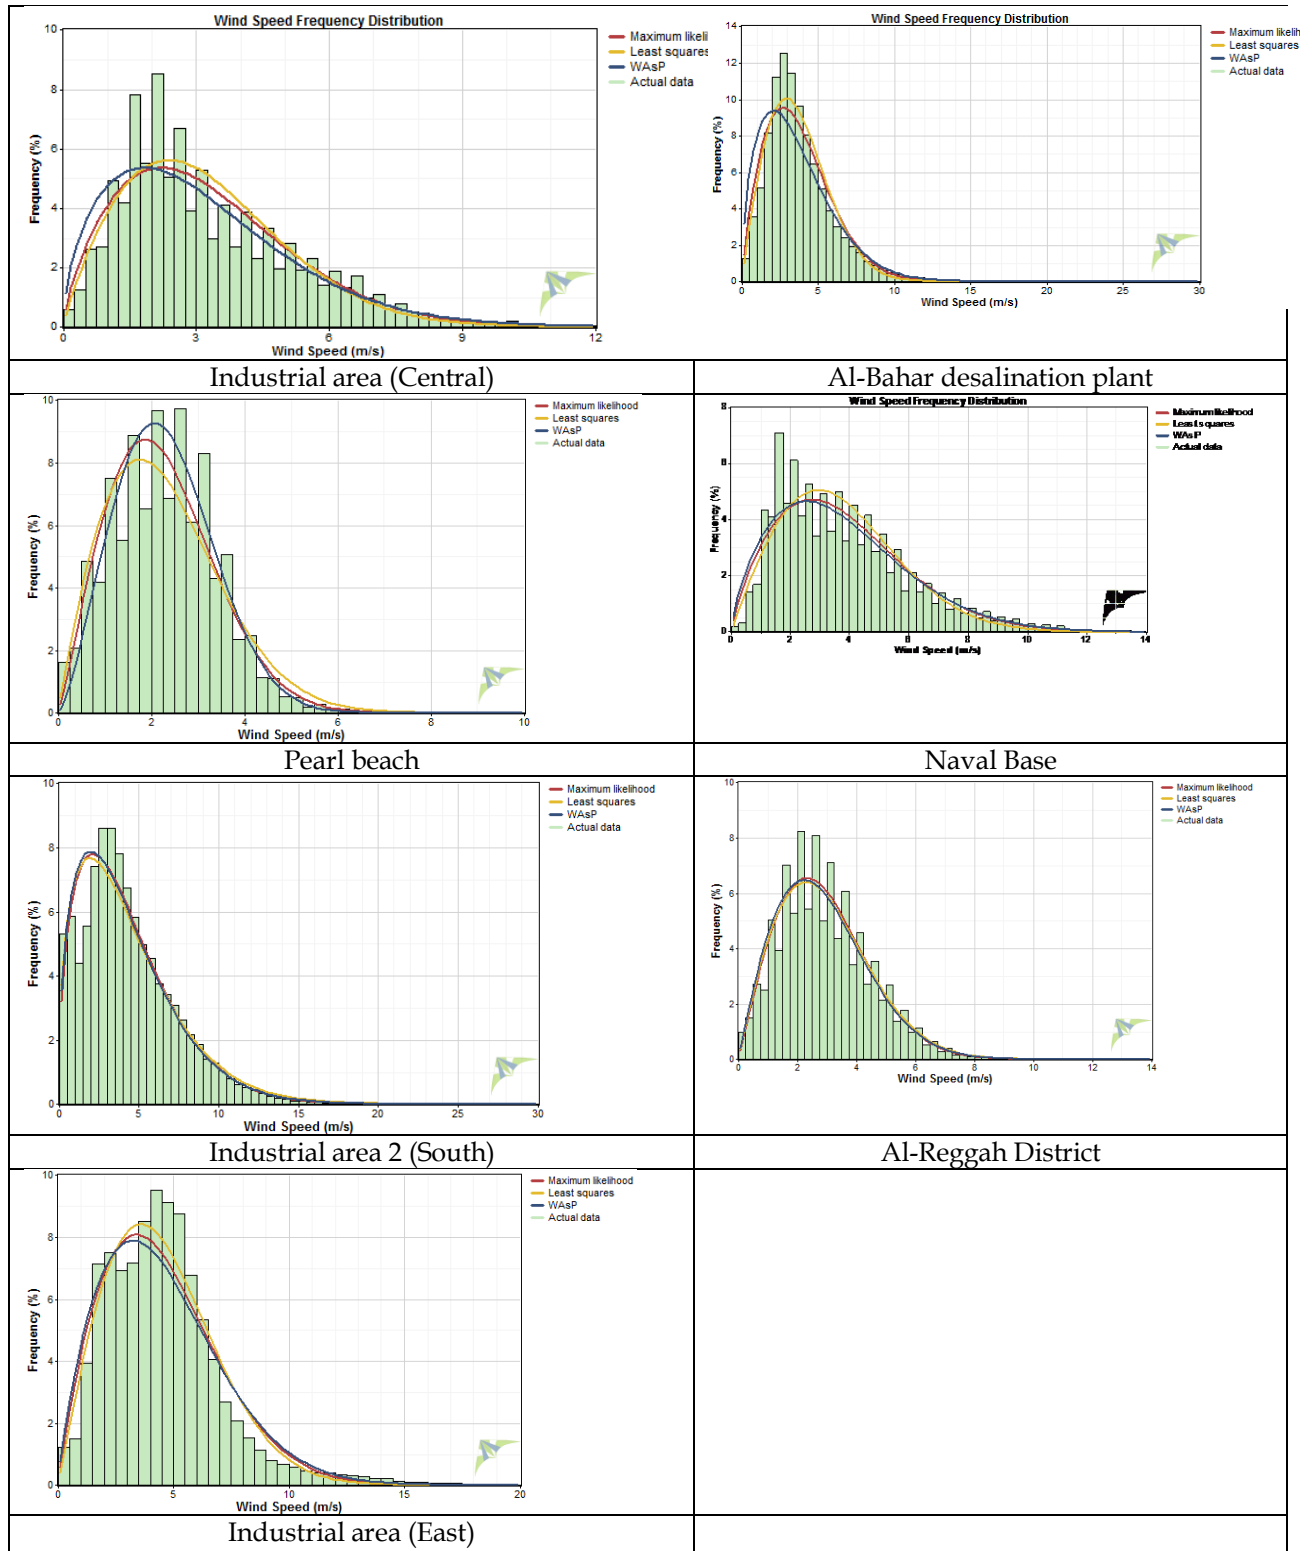


Fig. 8. Weibull probability distributions (three methods) and actual data at all sites.

4. Goodness-of-fit tests

To analyse the efficiency of the aforementioned Weibull parameter estimation methods, the following tests were conducted:

Coefficient of determination, R^2 , is the square of correlation between the frequency of Weibull to that of actual observations.

The coefficient of determination is computed according to the following equation [21, 9]:

$$R^2 = \frac{\sum_{i=1}^N (y_i - z_i)^2 - \sum_{i=1}^N (y_i - x_i)^2}{\sum_{i=1}^N (y_i - z_i)^2 - \sum_{i=1}^N (y_i - x_i)^2} \quad (15)$$

The root mean square error, $RMSE$ is the measure of the residuals of frequency of Weibull and actual observations [20].

$$RMSE = \sqrt{\left[\frac{1}{N} \sum_{i=1}^N (y_i - x_i)^2 \right]} \quad (16)$$

The mean bias error, MBE and mean bias absolute error, MAE are a measure of how closely frequency of Weibull match the actual observations [21, 9].

$$MBE = \frac{1}{N} \sum_{i=1}^N (y_i - x_i) \quad (17)$$

$$MAE = \frac{1}{N} \sum_{i=1}^N |y_i - x_i| \quad (18)$$

Where:

N is the number of observations, y_i is the frequency of observation, x_i is the frequency of Weibull and z_i is the mean wind speed

5. Results and discussion

The Weibull scale and shape parameters (c and k), wind power density (WPD) and statistical results (R^2 , $RSME$, MBE and MAE) for all sites estimated by Maximum likelihood method, least square regression method and WAsP method are shown in Tables 6 - 12. The average error in calculating the WPD was found to be 0.25% for maximum likelihood method, 6.8% for LSRM and 5.7% for WAsP method. It can be clearly validated by goodness-of-fit test indicators, i.e., R^2 , $RSME$, MBE and MAE at all sites that maximum likelihood method is the best method to represent the wind regime

in Jubail, very closely followed by least square regression and WAsP method. The monthly and annual Weibull parameters obtained by the most accurate method, maximum likelihood method are given in Table 13 and 14 respectively. The monthly and annual variation of Weibull parameters k and c is shown in Figs. 9, 10, 11 and 12.

Table 6
Weibull parameters, WPD and statistical results for Industrial area (Central).

Parameter estimation method	k	c (m/s)	WPD (w/m ²)	R^2	RMSE	MBE	MAE
Maximum likelihood method	1.724	3.675	48.5	0.86	0.175	-0.0046	0.3132
Least-Squares Regression Method	1.845	3.64	43.1	0.85	0.18112	-0.0047	0.3228
WAsP method	1.563	3.519	49.6	0.85	0.1849	-0.0048	0.3547

Table 7
Weibull parameters, WPD and statistical results for Al-Bahar desalination plant.

Parameter estimation method	k	c (m/s)	WPD (w/m ²)	R^2	RMSE	MBE	MAE
Maximum likelihood method	1.8	4.218	69.2	0.96	0.072	-0.0042	0.1758
Least-Squares Regression Method	1.952	4.2	61.9	0.96	0.07257	-0.0045	0.1784
WAsP method	1.548	4.012	74.8	0.91	0.1449	-0.003	0.2274

Table 8
Weibull parameters, WPD and statistical results for Pearl beach.

Parameter estimation method	k	c (m/s)	WPD (w/m ²)	R^2	RMSE	MBE	MAE
Maximum likelihood method	2.104	2.539	12.7	0.91	0.018	-0.0047	0.1155
Least-Squares Regression Method	1.924	2.582	14.6	0.9	0.02308	-0.0048	0.1433
WAsP method	2.367	2.611	12.5	0.9	0.0235	-0.005	0.1208

Table 9
Weibull parameters, WPD and statistical results for Naval Base.

Parameter estimation method	k	c (m/s)	WPD (w/m ²)	R^2	RMSE	MBE	MAE
Maximum likelihood method	1.799	4.263	71.4	0.86	0.16	-0.005	0.3521
Least-Squares Regression Method	1.973	4.205	61.4	0.85	0.17172	-0.0049	0.3619
WAsP method	1.718	4.218	73.7	0.84	0.1574	-0.005	0.3522

Table 10

Weibull parameters, WPD and statistical results for Industrial area 2 (South).

Parameter estimation method	k	c (m/s)	WPD (w/m ²)	R^2	RMSE	MBE	MAE
Maximum likelihood method	1.45	4.74	139.2	0.92	0.097	-0.0034	0.1482
Least-Squares Regression Method	1.392	4.788	155.9	0.92	0.0958	-0.0032	0.1624
WAsP method	1.421	4.678	139.4	0.92	0.097	-0.003	0.1491

Table 11

Weibull parameters, WPD and statistical results for Al-Reggah District

Parameter estimation method	k	c (m/s)	WPD (w/m ²)	R^2	RMSE	MBE	MAE
Maximum likelihood method	2.008	3.286	28.8	0.94	0.177	-0.0048	0.3504
Least-Squares Regression Method	1.957	3.304	30.1	0.93	0.1782	-0.0048	0.3497
WAsP method	1.938	3.242	28.7	0.93	0.178	-0.005	0.3485

Table 12

Weibull parameters, WPD and statistical results for Industrial area (East)

Parameter estimation method	k	c (m/s)	WPD (w/m ²)	R^2	RMSE	MBE	MAE
Maximum likelihood method	1.876	5.098	116	0.94	0.07	-0.0048	0.2339
Least-Squares Regression Method	1.999	5.096	107.8	0.94	0.0705	-0.0048	0.2139
WAsP method	1.799	5.1	122.3	0.93	0.0902	-0.005	0.2491

Table 13

Monthly Weibull parameters at all sites (Maximum likelihood method)

Location	Industrial area (Central)		Al-Bahar desalination plant		Pearl beach		Naval Base		Industrial area 2 (South)		Al-Reggah District		Industrial area (East)	
	k	c	k	c	k	c	k	c	k	c	k	c	k	c
Jan	1.892	3.691	1.572	4.869	2.016	2.539	2.013	4.202	1.666	4.443	1.845	3.467	2.415	4.591
Feb	1.680	3.962	1.697	5.254	2.126	2.913	1.88	4.913	1.556	5.247	1.893	3.760	1.942	5.579
Mar	1.700	4.003	1.835	4.556	2.108	2.698	1.73	5.053	1.566	5.058	1.942	3.483	1.91	5.817
Apr	1.649	3.504	1.871	3.938	2.118	2.509	1.896	4.203	1.528	5.117	2.045	3.246	1.938	5.363
May	1.662	4.106	1.759	4.247	2.253	2.644	1.825	4.409	1.382	5.662	2.178	3.314	1.909	5.644
Jun	1.673	4.476	1.731	4.442	2.047	2.785	1.704	4.876	1.351	5.800	2.063	3.484	1.721	6.133
Jul	1.675	4.133	1.885	4.159	2.307	2.651	1.692	4.279	1.266	4.378	2.259	3.313	1.940	5.706
Aug	1.608	3.392	2.035	3.724	2.267	2.406	1.787	3.556	1.356	3.686	2.229	2.966	1.938	5.060
Sep	1.762	3.533	2.033	3.802	2.256	2.343	1.888	3.543	1.643	4.753	2.165	2.95	1.473	4.244
Oct	1.759	3.189	2.044	3.941	2.118	2.229	1.821	3.755	1.697	4.237	2.127	2.883	2.410	4.095
Nov	2.056	3.639	2.169	4.180	2.258	2.436	2.101	4.237	1.625	4.436	2.024	3.290	2.699	4.516
Dec	2.020	3.492	2.231	3.643	1.989	2.355	2.009	4.191	1.461	4.101	1.912	3.282	2.535	4.380

Table 14
Annual Weibull parameters at all sites (Maximum likelihood method)

Year	Industrial area (Central)		Al-Bahar desalination plant		Pearl beach		Naval Base		Industrial area 2 (South)		Al-Reggah District		Industrial area (East)	
	<i>k</i>	<i>c</i>	<i>k</i>	<i>c</i>	<i>k</i>	<i>c</i>	<i>k</i>	<i>c</i>	<i>k</i>	<i>c</i>	<i>k</i>	<i>c</i>	<i>k</i>	<i>c</i>
2008	1.714	3.971	1.603	4.777	2.128	2.667	-	-	1.989	5.480	1.941	3.363	2.434	4.757
2009	1.700	3.658	1.899	4.301	2.109	2.548	-	-	1.875	5.251	1.992	3.318	2.318	4.450
2010	1.701	3.611	1.913	4.163	2.111	2.443	1.811	4.151	1.660	4.338	1.996	3.141	2.457	4.671
2011	1.743	3.880	1.927	3.641	2.178	2.578	1.834	4.429	1.194	3.849	2.104	3.343	2.320	4.563
2012	1.724	3.675	1.987	4.229	2.057	2.467	1.763	4.212	1.096	4.685	2.025	3.261	1.876	5.098

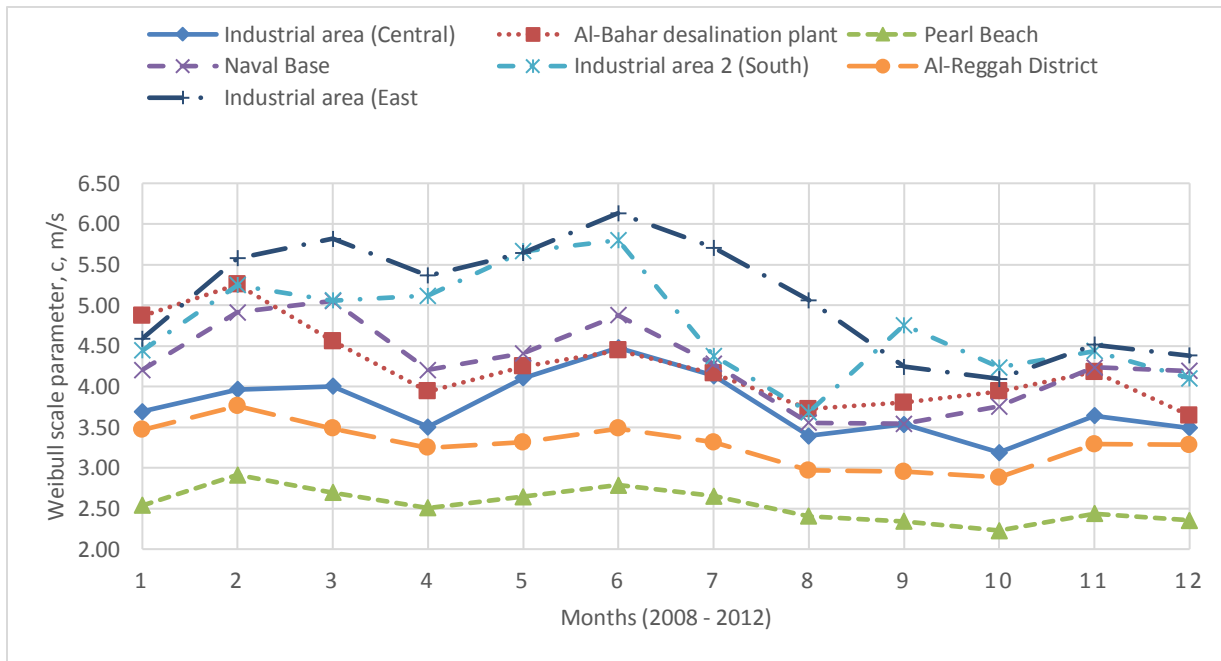


Fig. 9. Monthly variation of Weibull scale parameter, *c*, m/s at all sites.

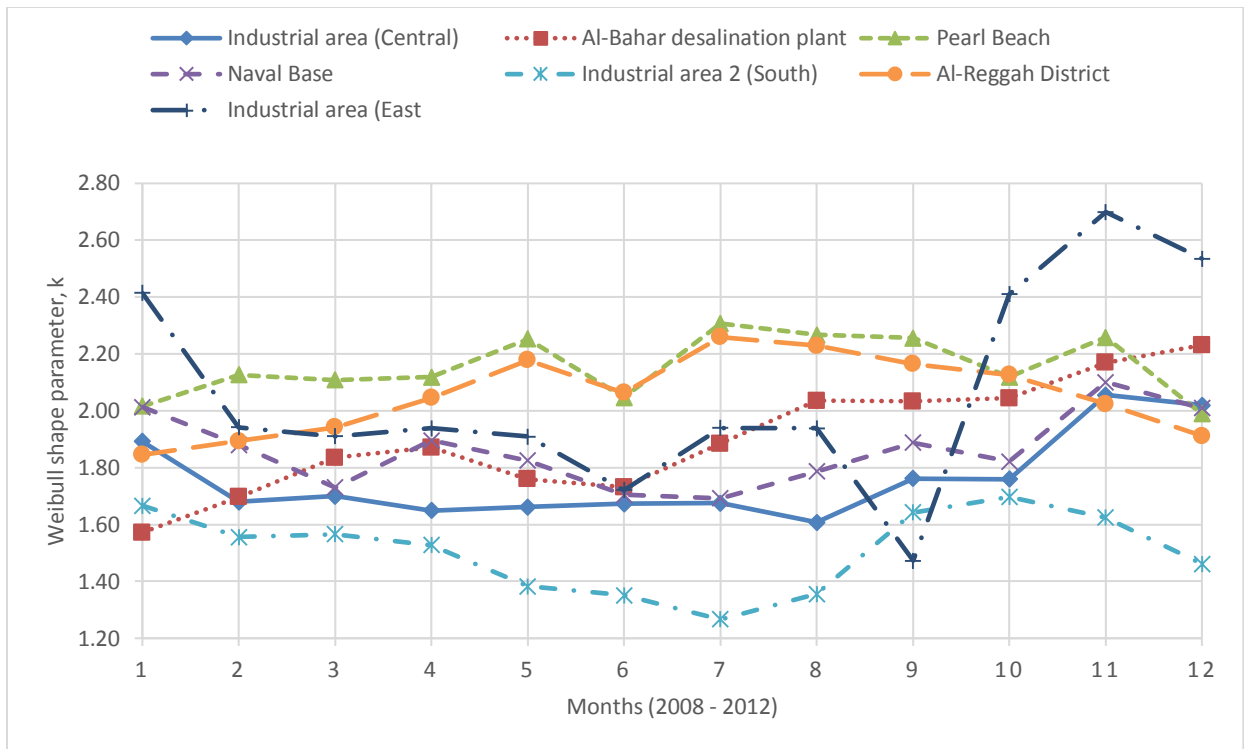


Fig. 10. Monthly variation of Weibull shape parameter, k at all sites.

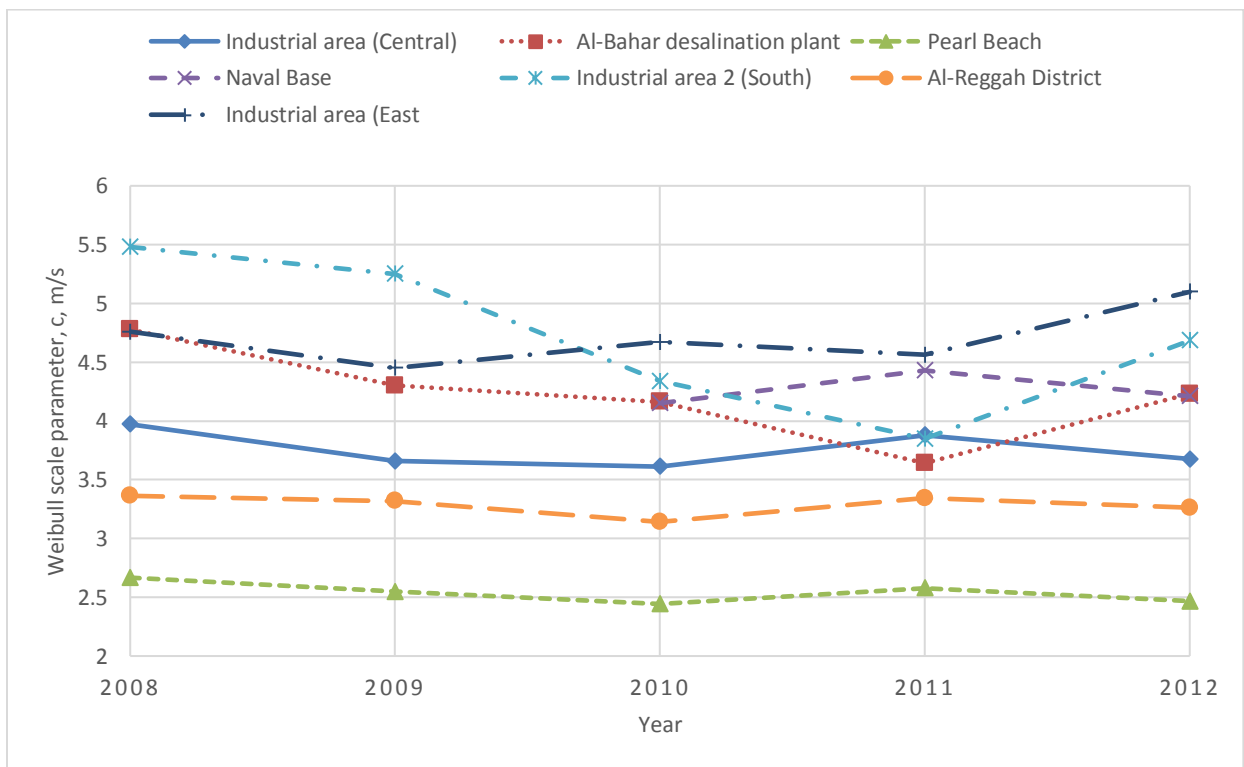


Fig. 11. Annual variation of Weibull scale parameter, c , m/s at all sites.

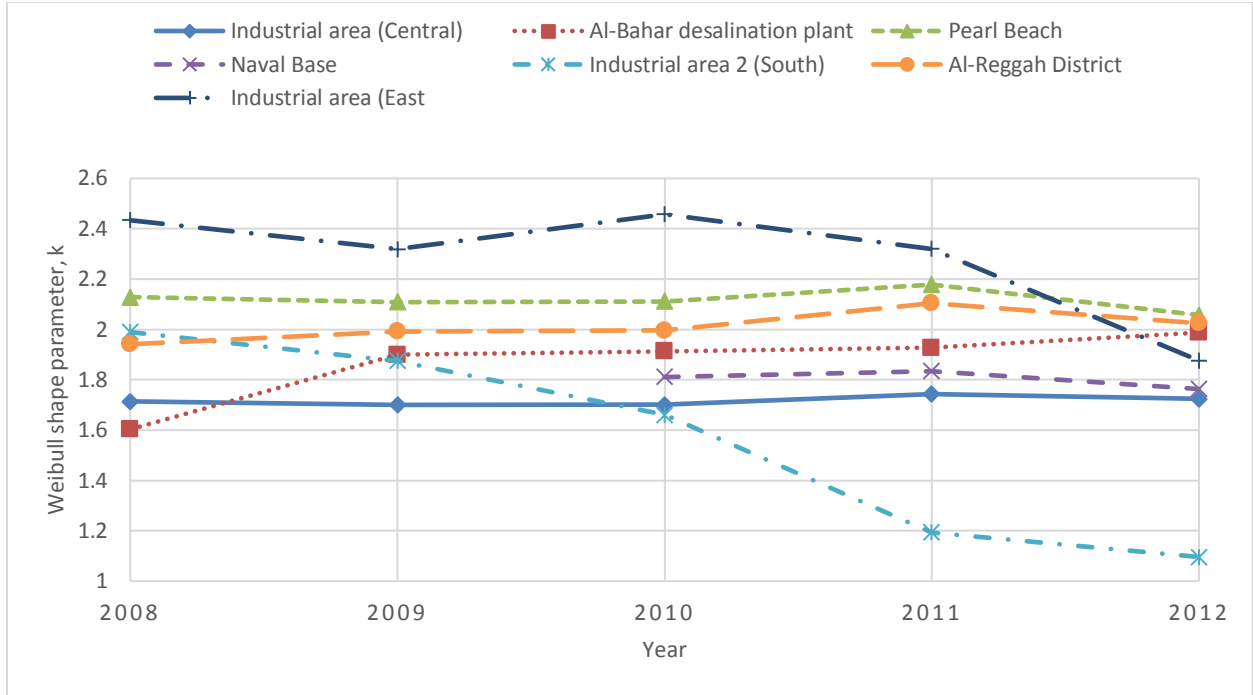


Fig. 12. Annual variation of Weibull shape parameter, k at all sites.

5.1 Most Probable Wind Speed

The most probable wind speed simply provides the most frequently occurring wind speed for a given wind probability distribution. In high wind potential sites, the most probable wind speed is close to the rated wind speed for a given wind machine. The most probable wind speed can be calculated using the Weibull shape and scale parameters via the following equation [22]:

$$V_{mp} = c \left(1 - \frac{1}{k}\right)^{\frac{1}{k}} \quad (14)$$

The most probable wind speed at all the seven locations at 10 m AGL was found using all three estimation methods and is shown in Fig. 13. All three estimation methods showed similar results. The highest most probable wind speeds determined by maximum likelihood method, least-square regression methods and WAsP are 3.39, 3.6 and 3.24 m/s respectively and were observed at Industrial area (east).

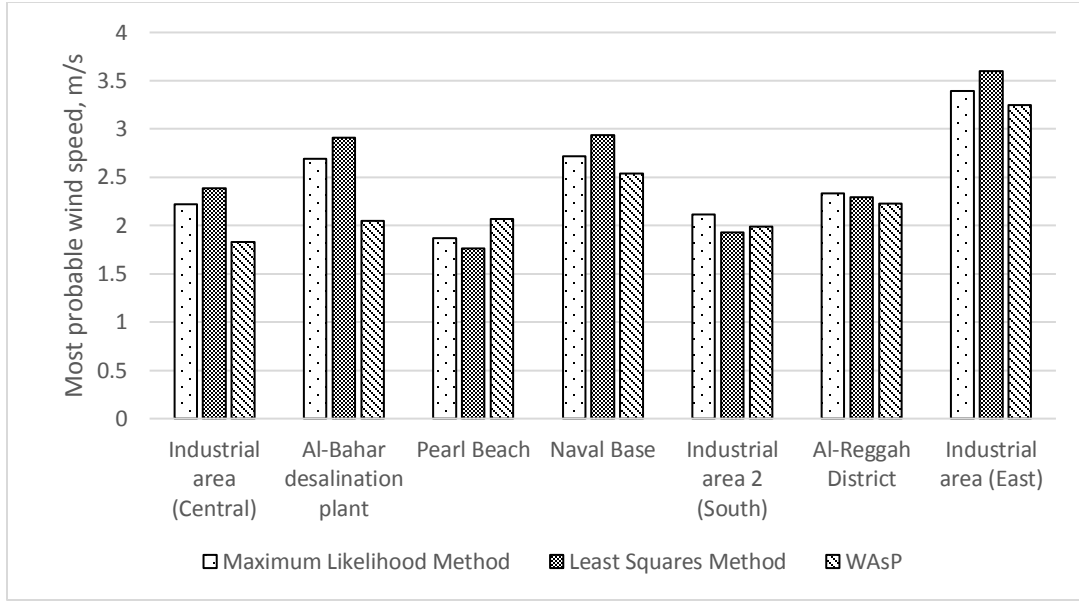


Fig. 13. Most probable wind speed at all sites.

5.2 Maximum Energy Carrying Wind Speed Estimation

The maximum energy carrying wind speed is the speed which generates maximum energy. This can be estimated from the Weibull parameters through the following relationship [22]:

$$V_{max,E} = c \left(1 + \frac{2}{k}\right)^{\frac{1}{k}} \quad (15)$$

The maximum energy carrying wind speed at all the seven locations at 10 m AGL was found using all three estimation methods is shown in Fig. 14 below. All three estimation methods showed similar results. The highest maximum energy carrying wind speed values of 8.61, 9.0 and 8.68 m/s; determined by maximum likelihood method, least-square regression methods and WAsP; were observed at Industrial area 2 (south). While at Industrial area (east) the respective values were found to be 7.5, 7.2 and 7.7 m/s respectively. These wind speeds are indicative of producing maximum energy in industrial area 2 (south) and industrial area (east).

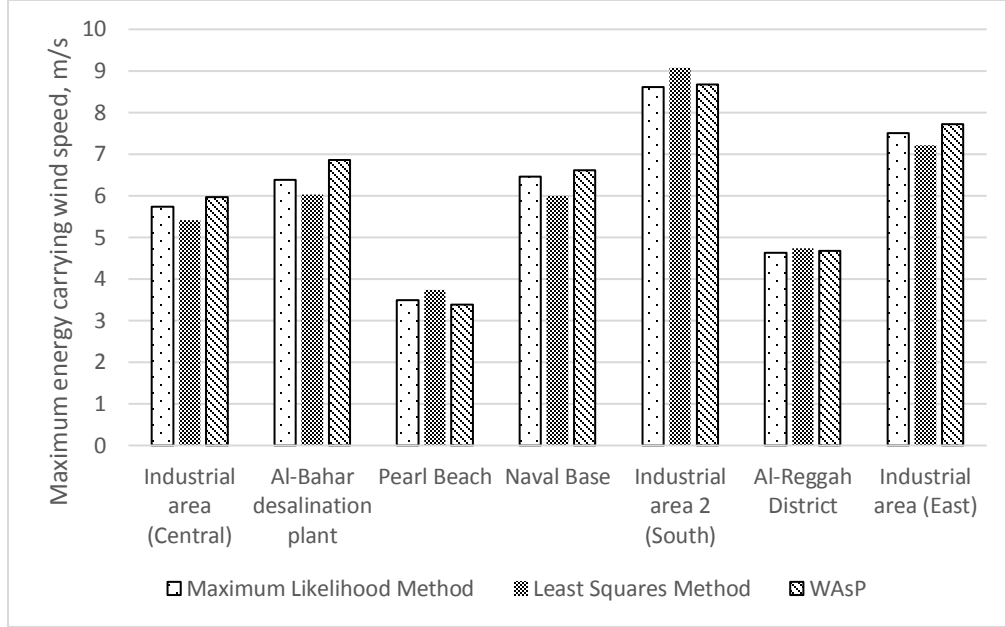


Fig. 14. Maximum energy carrying wind speed at all sites.

5.3 Energy Output

The wind energy output from five different commercially available wind machines with rated power of 1.8 to 3.3 MW was determined at all the sites. The wind speed frequency at different hub heights at all sites was determined by vertical extrapolation of wind speed using the local wind shear exponent value of 0.217. This value of wind shear coefficient was obtained by using measured wind speed at 10, 50 and 90 m heights AGL at Industrial area (central).

The wind shear coefficient, α , was calculated using the following equation [23]:

$$\alpha = \frac{\ln(V_2) - \ln(V_1)}{\ln(Z_2) - \ln(Z_1)} \quad (16)$$

Where V_1 and V_2 are wind speeds at height Z_1 and Z_2 respectively.

The air density used in energy output calculations, was calculated using the local pressure and temperature measurements at Industrial area (central).

The air density, ρ was calculated using the following equation:

$$P = \frac{\rho}{RT} \quad (\text{Kg/m}^3) \quad (17)$$

Where P is the air pressure in Pascals, R is the specific gas constant of air, 287.05 J/kg.K and T is the local air temperature in degrees Kelvin. An overall mean air density at this station was found to be 1.17 kg/m³. To find the energy output from selected wind turbine, the number of hours the wind speed remained in different wind speed bins is determined at the turbine hub height. Then using the power curve data of the selected wind machine, the energy output is calculated. In this study, the energy output is calculated using Windographer [20] software. The plant capacity factor, PCF is the ratio of its actual annual output, to its rated output. The technical specifications of wind machines used in this study are summarised in Table 15. The annual energy output in MWh/year and Plant capacity factor, PCF in % is presented in Figure 15 and 16 respectively. It can be observed from these figures that the most feasible site for wind farm development in Jubail city is Industrial area (East). At this site, the maximum energy output of 11,135 MWh/year was obtained at a PCF of 41.3% from a commercially available wind machine of 3 MW rated power.

The comparison of %PCF of these five wind machines at all sites reveals that wind machine 5 (1.8 MW rated power) is most efficient at all sites in Jubail. A low rated power wind machine is more efficient for low or mediocre wind potential areas [23]. Wind machines 1, 2 and 4 of rated power 3.3, 3.0 and 2.0 MW respectively were found to have similar mediocre efficiency. Wind machine 3 (2.6 rated power) is found to be least efficient for all sites Jubail.

Table 15 Technical data of wind machines [19]

Wind machine	Cut-in speed (m/s)	Cut-out speed (m/s)	Rated output (kW)	Rated wind speed (m/s)	Hub height (m)	Rotor diameter (m)
WM 1	3	25	3300	12	117	126
WM 2	3	22.5	3000	12	119	126
WM 3	4	23	2600	15	75	100
WM 4	3	25	2000	11.5	80	110
WM 5	4	20	1800	12	80	100

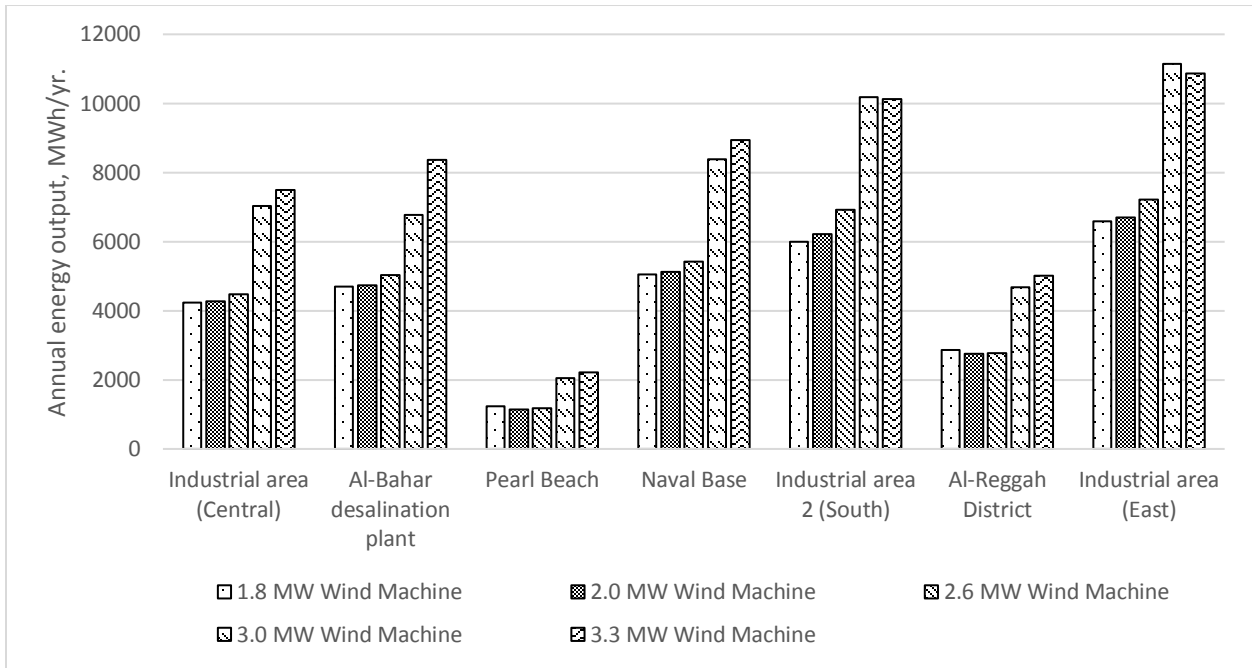


Fig. 15. Annual energy output of different wind machines at all sites.

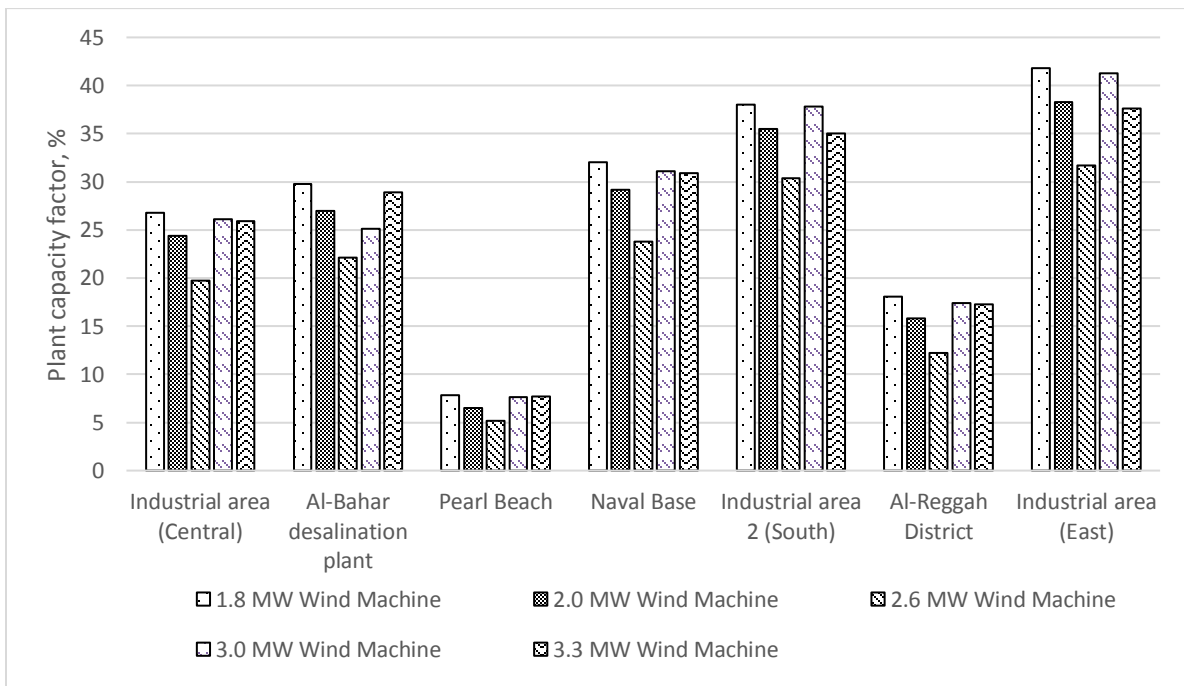


Fig. 16. Plant capacity factor of different wind machines at all sites.

6. Concluding Remarks

The following main observations can be drawn from this study:

The wind characteristics of seven locations in Jubail, Saudi Arabia were analysed. At 10 m AGL, the annual mean wind speeds varied from 2.25 m/s (standard deviation 1.109 m/s) at Pearl beach to 4.52 m/s (standard deviation 2.52 m/s) at Industrial area (east). In general, at all sites, the highest monthly mean wind speed was observed in February/June and the lowest in September/October. The period of higher winds availability coincides with high power demand period of the area due to air conditioning load. The most prevailing wind direction was from the north-west which means that the wind machines can spread facing the prevailing wind direction.

The goodness-of-fit test indicators, i.e., R^2 , $RSME$, MBE and MAE show that the maximum likelihood method is the most efficient method of Weibull parameter estimation for Jubail region followed by least square regression method and WASP. The highest value of most probable wind speed was found to be in the range 3.2 m/s to 3.6 m/s at industrial area (east) by three estimation methods. The highest value of maximum energy carrying wind speed was found to be in the range 8.6 m/s to 9.0 m/s at industrial area 2 (south) by three estimation methods.

The wind energy output from five different commercially available wind machines with rated output ranging from 1.8 to 3.3 MW at all the sites shows that most feasible site for wind farm development in Jubail city is Industrial area (East). At this site, the maximum energy output of 11,135 MWh/year with a PCF of 41.3% from a 3 MW rated power wind machine was obtained. The second best site for wind farm development is Industrial area 2 (south). At this site, the maximum energy output of 10,180 MWh/year with a PCF of 37.8 % from a 3 MW rated power wind machine was obtained. From %PCF, it can be concluded that Wind machine 5 (1.8 MW rated power) is most efficient at all sites in Jubail as a low rated power wind machine is more efficient for mediocre wind potential areas.

Acknowledgement:

The authors would like to acknowledge Jubail industrial college, Royal commission for Jubail and Yanbo, Saudi Arabia for providing the weather data used in this study. The authors would also like to acknowledge the technical support and guidance provided by King Fahd University of Petroleum and Minerals, Dhahran-31261, Saudi Arabia and University of Pretoria, Pretoria, Republic of South Africa.

7. References

- [1] Rehman, S., Halawani, T. O., and Husain, T. (1994). Weibull Parameters for Wind Speed Distribution in Saudi Arabia. *Solar Energy* 53(6): 473-479
- [2] Wentink, T. 1976. Study of Alaskan wind power potential and its possible applications. Final Report (Rep. No. NSF/RANN/SE/AER 74-00239/FR-76/ 1), Geophysical Institute, University of Alaska.
- [3] Rehman, S. and Halawani, T. O. (1994). Statistical characteristics of wind in Saudi Arabia. *Renewable Energy* 4(8): 949-956.
- [4] Islam, M.R., R. Saidur, and N.A. Rahim. (2011). Assessment of wind energy potentiality at Kudat and Labuan, Malaysia using Weibull distribution function. *Energy* 36(2):985-92.
- [5] Rehman, S., A. M. Mahbub Alam, J. P. Meyer, L. M. Al-Hadhrani. (2012). Wind speed characteristics and resource assessment using Weibull parameters. *International Journal of Green Energy* 9: 800-814.
- [6] Stevens, M.J.M., and Smulders, P.T. (1979). The estimation of the parameters of the Weibull wind speed distribution for wind energy utilization purposes. *Wind Engineering* 3(2): 132-45.
- [7] Seguro, J.V., Lambert, T.W. (2000). Modern estimation of the parameters of the Weibull wind speed distribution for wind energy analysis. *Journal of Wind Engineering and Industrial Aerodynamics* 85: 75-84.

- [8] Bagiorgas, H.S., Giouli, M., Rehman, S., Al-Hadhrami, L.M. (2011). Weibull parameters estimation using four different methods and most energy-carrying wind speed analysis. *International Journal of Green Energy* 8 (5): 529-554.
- [9] Costa Rocha, P.A., de Sousa, R.C., de Andrade, C.F., and da Silva, M.E.V. (2012). Comparison of seven numerical methods for determining Weibull parameters for wind energy generation in the northeast region of Brazil. *Appl. Energy* 89: 395-400.
- [10] Seyit A. Akdag, and Ali Dinler. (2009). A new method to estimate Weibull parameters for wind energy applications. *Energy Conversion and Management* 50: 1761-1766.
- [11] Philippopoulos K, Deligiorgi D, and Karvounis G. (2012). Wind speed distribution modeling in the greater area of Chania, Greece. *International Journal of Green Energy* 9: 174-193.
- [12] Faruk Kose, Muharrem Hilmi Aksoy, and Muammer Ozgoren. (2014). An Assessment of Wind Energy Potential to Meet Electricity Demand and Economic Feasibility in Konya, Turkey. *International Journal of Green Energy* 11 (6): 559-576
- [13] Florin Onea, and Eugen Rusu. (2014). An evaluation of the wind energy in the north-west of the black sea. *International Journal of Green Energy* 11(5): 465-487.
- [14] The Vision, King Abdullah City of Atomic and Renewable energy (KACARE). Available at: <http://www.kacare.gov.sa/en/?page_id=84> (Accessed 30.03.2016)
- [15] Kalogirou, Soteris A. Michaelides, Silas. (2004) Time series prediction of wind speed Proceedings of the 7th Panhellenic (International) Conference of Meteorology, Climatology and Atmospheric Physics, Nicosia, Cyprus, Vol. 1, pp. 294-299
- [16] The Saline Water Conversion Corporation (SWCC) Available at: <<http://www.swcc.gov.sa/english/pages/home.aspx>> (Accessed 4.4.2016)

- [17] Kalogirou, S. (2005). Seawater Desalination Using Renewable Energy Sources. *Progress in Energy and Combustion Science* 31 (3): 242-281.
- [18] F.C. Odo, S.U. Offiah and P.E. Ugwuoke. (2012). Weibull distribution-based model for prediction of wind potential in Enugu, Nigeria. *Advances in Applied Science Research* 3 (2): 1202-1208.
- [19] Justus, C.G., Hargraves, W.R., Mikhail, A., and Graber, D. (1978). Methods for estimating wind speed frequency distributions. *Journal of Applied Meteorology* 17:350-353.
- [20] Windographer 3.2.3, 2014. Wind Resources Assessment Tool. <http://www.mitsaya.com>.
- [21] De Miguel, A., Bilbao, J. (2005). Test reference year generation from meteorological and simulated solar radiation data. *Solar Energy*, 78, Issue 6, 695-822.
- [22] Akpınar, E. K., and Akpınar, S. (2005). An assessment on seasonal analysis of wind energy characteristics and wind turbine characteristics. *Energy Conversion and Management* 46(11-12): 1848-1867.
- [23] Alawaji S.H., Eugenio N.N., Elani U.A. (1996). Wind energy resource assessment in Saudi Arabia. Part II: Data Collection and Analysis. *Renewable Energy* 9 (4): 818-821.
- [24] Panayiotou, G., Kalogirou, S., Tassou, S. (2012). Design and Simulation of a PV and a PV-Wind Standalone Energy System to power a Household Application, *Renewable Energy* 37 (1): 355-363.